

5019




DH-Series 16 Channel with 16 PoE Network Video Recorder



Features


- Up to 16/32 channel IP camera input
- H.264/MJPEG dual codec decoding
- Max 200Mbps incoming bandwidth
- Up to 5Mp resolution preview & playback
- HDMI/VGA simultaneous video output
- 16 channel synchronous realtime playback, GRID interface
- Support Multi-brand network cameras: Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivotek and etc.
- ONVIF Version 2.4 conformance
- 3D intelligent positioning with Dahua PTZ camera
- Support 2 SATA HDDs up to 8TB, 2 USB(1 USB3.0)
- Support IPC UPnP, 16PoE ports
- Multiple network monitoring: Web viewer, CMS(DSS/Smart PSS) & DMSS

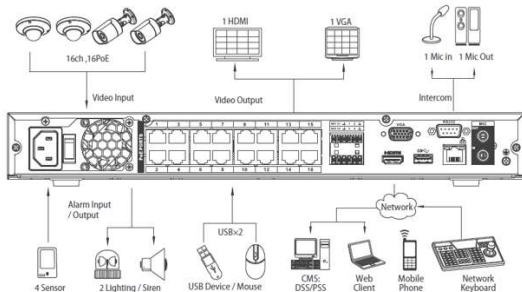

System	
Main Processor	Dual-core embedded processor
Operating System	Embedded LINUX
Video & Audio	
IP Camera Input	16 channel
Two-way Talk	1 channel Input, 1 channel Output, RCA
Display	
Interface	1 HDMI, 1 VGA
Resolution	1920×1080, 1280×1024, 1280×720, 1024×768
Display Split	1/4/8/9/16
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording
Recording	
Compression	H.264/MJPEG
Resolution	5Mp(2560×1920)/4Mp(2560×1440)/3Mp(2048×1536)/1080P(1920×1080)/720P(1280×720)/D1 (704×576/704×480)
Record Rate	200Mbps
Bit Rate	48–8192kbps
Record Mode	Manual, Schedule(Regular(Continuous), MD, Alarm), Stop
Record Interval	1–120 min (default: 60 min), Pre-record: 1–30 sec, Post-record: 10–300 sec
Video Detection & Alarm	
Trigger Events	Recording, PTZ, Tour, Alarm, Video Push, Email, FTP, Snapshot, Buzzer & Screen tips
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank
Alarm Input	4 channel
Relay Output	2 channel
Playback & Backup	
Sync Playback	1/4/8/16
Search Mode	Time/Date, Alarm, MD & Exact search (accurate to second), Smart search
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom
Backup Mode	USB Device/Network/Internal SATA burner
Network	
Ethernet	1 RJ-45 port (10/100/1000Mbps)
PoE	16 ports (IEEE802.3at/af)
Network Function	HTTP, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, IP Search(Support Dahua IP camera, DVR, NVS and etc.)
Max. User Access	128 users
Smart Phone	iPhone, iPad, Android
Storage	
Internal HDD	2 SATA ports, up to 8TB
Auxiliary Interface	
USB	2 ports (1 Rear USB3.0, 1 Front USB2.0)
RS232	1 port, For PC communication & Keyboard
General	
Power Supply	Single, AC 100–240V, 47/63 Hz
Power Consumption	NVR: <30W(without HDD) PoE: Max 25.5W for single port, 130W in total
Working Environment	-10°C–+55°C / 10%–90%RH / 86–106kpa
Dimension (W×D×H)	1U, 375mm×327mm×53mm
Weight	2.5KG(without HDD)

OUR LOCATION

1300 N. FLORIDA MANGO RD
SUITE 14A
WEST PALM BEACH, FL 33409



CCTV AGENT

CONTACT INFO

TOLL FREE: 877.523.CCTV (2288)
MAIN : 561.249.4511
EMAIL : SALES@CCTVAGENT.COM